


### 1200V 75A CoolFAST™ 7 Technology IGBT


#### Features:

- Low Switching Power Loss
- Low Switching Surge And Noise
- Advanced Field Stop Technology
- Low EMI
- Maximum Junction Temperature 175°C
- Qualified According To JEDEC For Target Applications
- Pb-free Lead Plating, Halogen-free Mold Compound, RoHS Compliant

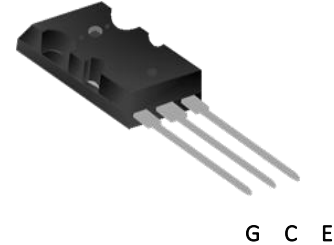

#### Applications:

- Industrial UPS
- Welding Machine
- Solar Converters
- Energy Storage
- EV Charger

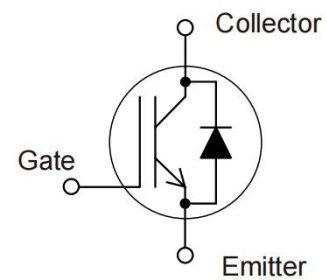

#### Key Performance and Package Parameters

Type	V <sub>CE</sub>	I <sub>C</sub>	V <sub>CEsat</sub> , T <sub>vj</sub> =25°C	T <sub>vjmax</sub>	Marking	Package
DKC75N120DF7	1200V	75A	1.96V	175°C	DKC75N120DF7	TO264-3L

#### Maximum Ratings and Characteristics

##### Absolute Maximum Ratings at T<sub>vj</sub>= 25°C (unless otherwise specified)

Items	Symbols	Value	Units
Collector-emitter voltage	V <sub>CEs</sub>	1200	V
Gate-emitter voltage	V <sub>GES</sub>	±20	V
Transient gate-emitter voltage (t <sub>p</sub> ≤ 10μs, D < 0.010)	V <sub>GES</sub>	±30	V
DC collector current, limited by T <sub>vjmax</sub>	I <sub>C</sub>	115	A
T <sub>c</sub> = 25°C	I <sub>C</sub>	115	A
T <sub>c</sub> = 100°C	I <sub>C</sub>	82	A
Pulsed collector current, t <sub>p</sub> limited by T <sub>vjmax</sub>	I <sub>CP</sub>	300	A
Turn-off safe operating area	-	300	A
V <sub>ce</sub> ≤ 1200V, T <sub>j</sub> ≤ 175°C, t <sub>p</sub> = 1μs	-	300	A
Diode forward current, limited by T <sub>vjmax</sub>	I <sub>F</sub>	150	A
T <sub>c</sub> = 25°C	I <sub>F</sub>	150	A
T <sub>c</sub> = 100°C	I <sub>F</sub>	75	A
Diode pulsed collector current, t <sub>p</sub> limited by T <sub>vjmax</sub>	I <sub>FP</sub>	300	A
IGBT max. power dissipation	P <sub>D_IGBT</sub>	625	W
FWD max. power dissipation	P <sub>D_FWD</sub>	349	W
Operating junction temperature	T <sub>vj</sub>	-40 ~ +175	°C
Storage temperature	T <sub>stg</sub>	-55 ~ +150	°C

### Electrical Characteristics at $T_{vj}= 25^{\circ}\text{C}$ (unless otherwise specified)

Description	Symbols	Conditions	Characteristics			Unit
			Min	Typ	Max	
Collector-emitter breakdown voltage	$V_{(BR)CES}$	$V_{GE}= 0\text{V}, I_C= 0.50\text{mA}$	1200	-	-	V
Zero gate voltage collector current	$I_{CES}$	$V_{CE}= 1200\text{V}, V_{GE}= 0\text{V}$	-	-	200	$\mu\text{A}$
Gate-emitter leakage current	$I_{GES}$	$V_{CE}= 0\text{V}, V_{GE}= \pm 20\text{V}$	-	-	$\pm 200$	nA
Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE}= V_{GE}, I_C= 250\mu\text{A}$	5.0	5.9	6.6	V
Collector-emitter saturation voltage	$V_{CE(sat)}$	$V_{GE}= 15\text{V}, I_C= 75\text{A}$ $T_{vj}= 25^{\circ}\text{C}$ $T_{vj}= 175^{\circ}\text{C}$	-	1.96	2.40	V
			-	2.72		
Input capacitance	$C_{ies}$	$V_{CE}= 25\text{V}, V_{GE}= 0\text{V}$ $f= 1\text{MHz}$	-	19.5	-	nF
Output capacitance	$C_{oes}$		-	240	-	pF
Reverse transfer capacitance	$C_{res}$		-	130	-	pF
Gate charge	$Q_G$	$V_{CC}= 960\text{V}, I_C= 75\text{A}, V_{GE}= 15\text{V}$	-	570	-	nC
Forward voltage drop	$V_F$	$I_F= 75\text{A}$ $T_{vj}= 25^{\circ}\text{C}$ $T_{vj}= 175^{\circ}\text{C}$	-	2.3	3.0	V
			-	1.8		

### Switching Characteristics at $T_{vj}= 25^{\circ}\text{C}$


Description	Symbols	Conditions	Characteristics			Unit
			Min	Typ	Max	
<b>IGBT Characteristics</b>						
Turn-on delay time	$t_{d(on)}$	$V_{CC}= 600\text{V}$ $I_C= 75\text{A}$ $V_{GE}= 15\text{V}$ $R_G= 10\Omega$	-	118	-	ns
Rise time	$t_r$		-	138	-	ns
Turn-off delay time	$t_{d(off)}$		-	472	-	ns
Fall time	$t_f$		-	82	-	ns
Turn-on energy	$E_{on}$		-	4.97	-	mJ
Turn-off energy	$E_{off}$		-	3.52	-	mJ
Total switching energy	$E_{ts}$		-	8.49	-	mJ
<b>Diode Characteristics</b>						
Diode reverse recovery time	$t_{rr}$	$V_{CC}= 600\text{V}$	-	127.9	-	ns
Diode reverse recovery charge	$Q_{rr}$	$I_F= 75\text{A}$	-	2.97	-	$\mu\text{C}$
Diode peak reverse recovery current	$I_{rrm}$	$di_F/dt= 1000\text{A}/\mu\text{s}$	-	66.18	-	A

### Switching Characteristics at $T_{vj}=175^{\circ}\text{C}$


Description	Symbols	Conditions	Characteristics			Unit
			Min	Typ	Max	
<b>IGBT Characteristics</b>						
Turn-on delay time	$t_{d(on)}$	$V_{CC}= 600\text{V}$ $I_C= 75\text{A}$ $V_{GE}= 15\text{V}$ $R_G= 10\Omega$	-	100	-	ns
Rise time	$t_r$		-	128	-	ns
Turn-off delay time	$t_{d(off)}$		-	534	-	ns
Fall time	$t_f$		-	104	-	ns
Turn-on energy	$E_{on}$		-	4.86	-	mJ
Turn-off energy	$E_{off}$		-	4.04	-	mJ
Total switching energy	$E_{ts}$		-	8.9	-	mJ
<b>Diode Characteristics</b>						
Diode reverse recovery time	$t_{rr}$	$V_{CC}= 600\text{V}$	-	301.3	-	ns
Diode reverse recovery charge	$Q_{rr}$	$I_F= 75\text{A}$	-	12.78	-	$\mu\text{C}$
Diode peak reverse recovery current	$I_{rrm}$	$di_F/dt= 1000\text{A}/\mu\text{s}$	-	86.19	-	A

## Thermal Resistance


Items	Symbols	Characteristics			Unit
		Min	Typ	Max	
Thermal resistance, junction-ambient	$R_{th(j-a)}$	-	-	50	°C/W
Thermal resistance, IGBT junction to case	$R_{th(j-c)}$	-	-	0.24	
Thermal resistance, diodes junction to case	$R_{th(j-c)}$	-	-	0.43	

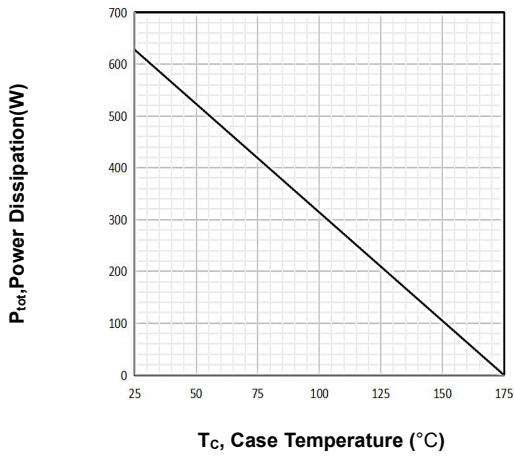


**Figure 1. Power dissipation vs. case temperature**  
( $T_{vj} \leq 175^\circ\text{C}$ )

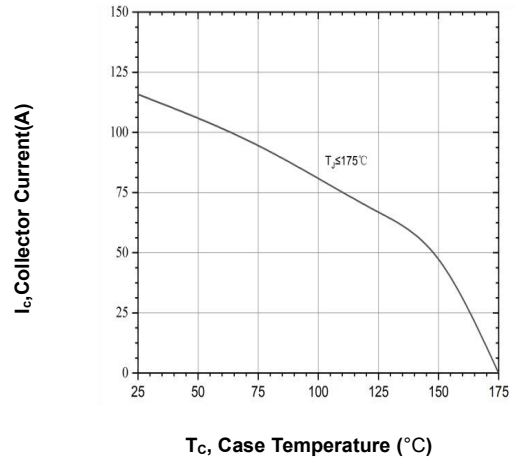


**Figure 2. DC Collector current vs. Case temperature**  
( $V_{GE} \leq 15\text{V}$ ,  $T_{vj} \leq 175^\circ\text{C}$ )

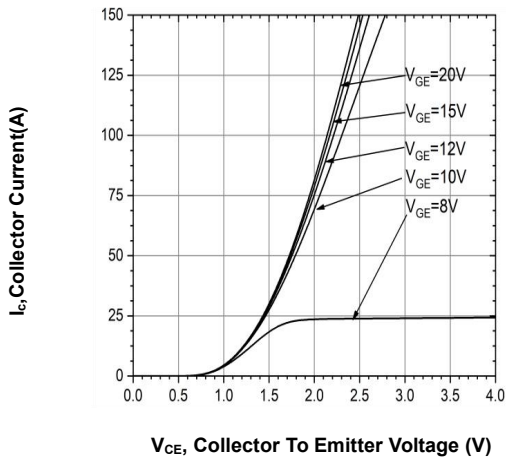


**Figure 3. Typical output characteristic**  
( $T_{vj} = 25^\circ\text{C}$ )

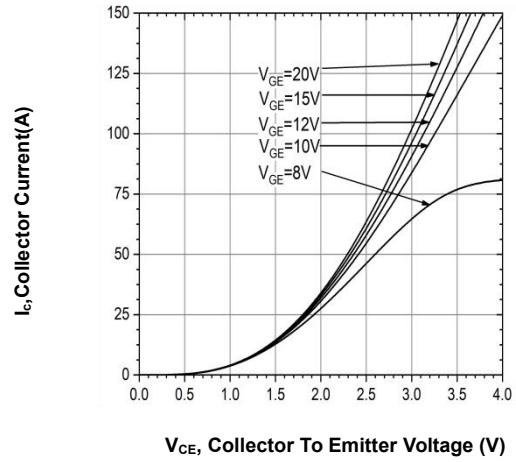


**Figure 4. Typical output characteristic**  
( $T_{vj} = 175^\circ\text{C}$ )

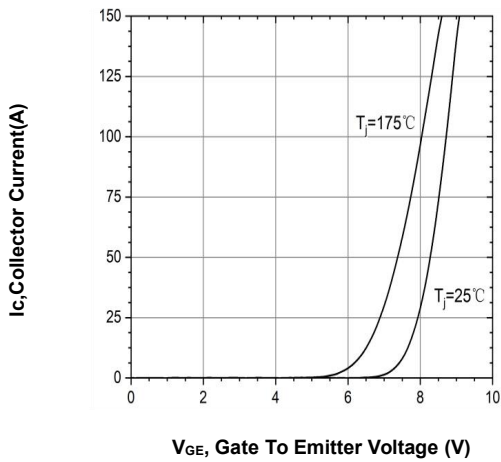


**Figure 5. Typical transfer characteristic**  
( $V_{CE} = 20\text{V}$ )

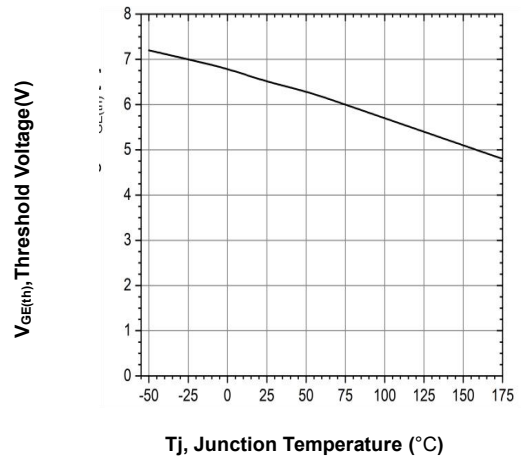


**Figure 6. Gate threshold voltage**  
( $I_c = 75\text{mA}$ ,  $V_{CE} = 20\text{V}$ )

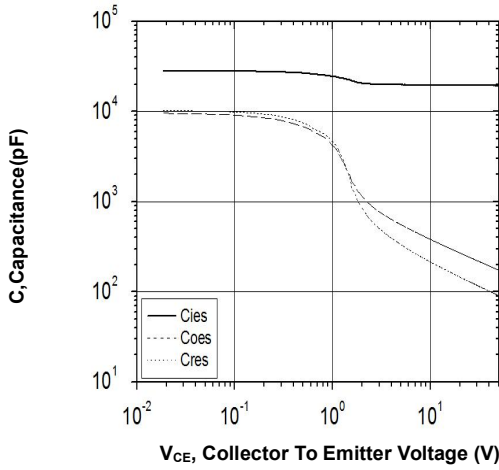


**Figure 7. Typical capacitance vs. collector-emitter voltage** ( $V_{GE}=0V$ ,  $f=1MHz$ )

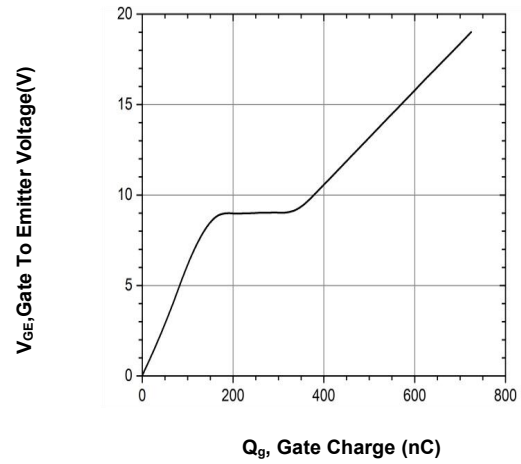


**Figure 8. Typical gate charge** ( $I_C=75A$ ,  $V_{CE}=960V$ ,  $T_{vj}=25^\circ C$ )

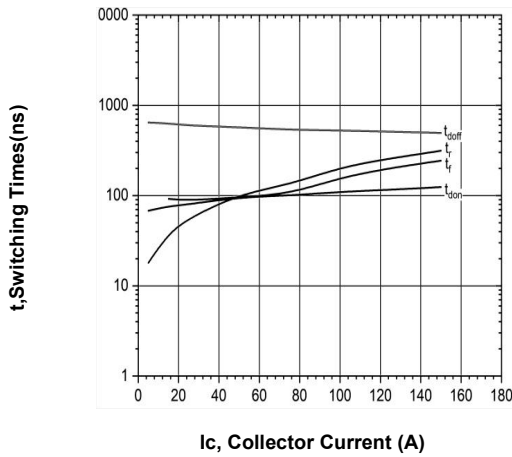


**Figure 9. Typical switching times vs. collector current** ( $T_{vj}=175^\circ C$ ,  $V_{CE}=600V$ ,  $V_{GE}=15V$ ,  $R_g=10\Omega$ )

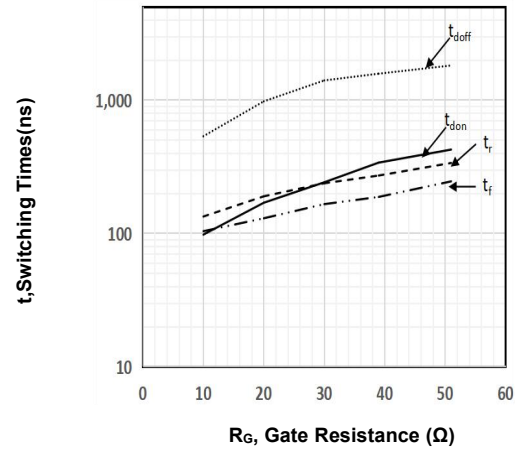


**Figure 10. Typical switching times vs. gate resistor** ( $T_{vj}=175^\circ C$ ,  $V_{CE}=600V$ ,  $V_{GE}=15V$ ,  $I_C=75A$ )

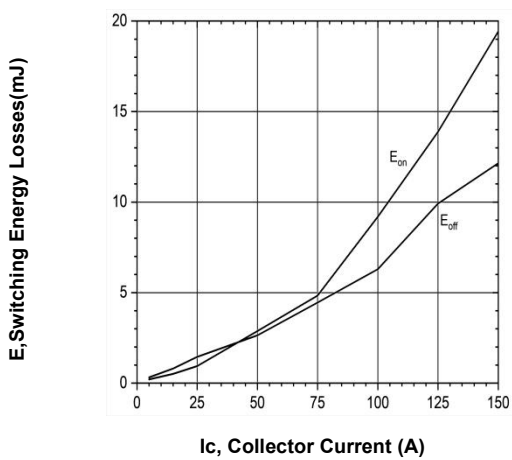


**Figure 11. Typical switching losses vs. Collector current** ( $T_{vj}=175^\circ C$ ,  $V_{CE}=600V$ ,  $V_{GE}=15V$ ,  $R_g=10\Omega$ )

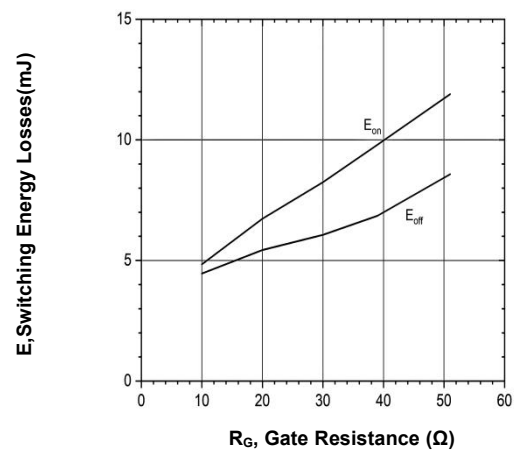


**Figure 12. Typical capacitance vs. collector-emitter voltage** ( $T_{vj}=175^\circ C$ ,  $V_{CE}=600V$ ,  $V_{GE}=15V$ ,  $R_g=10\Omega$ )

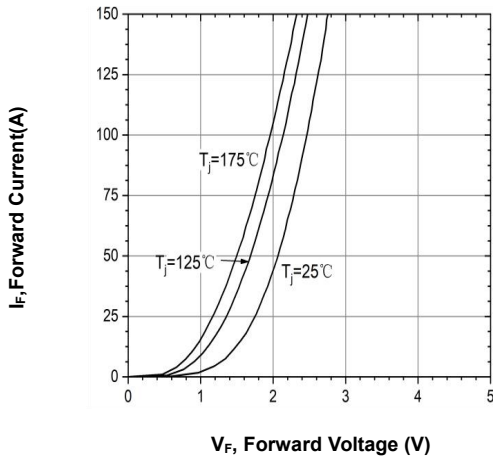


**Figure 13. Typical forward characteristics of diode**  
( $V_{CE} = 600V$ ,  $V_{GE} = 15V$ ,  $R_g = 10\Omega$ )

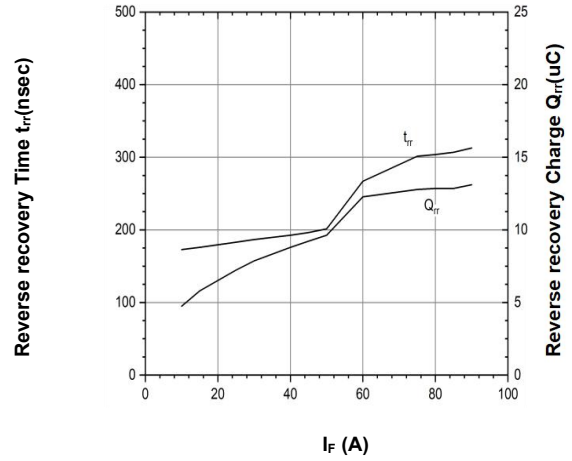

**Figure 14. Typical reverse recovery characteristics vs. forward current of diode**  
( $T_j = 175^\circ C$ ,  $V_{CE} = 600V$ ,  $V_{GE} = 15V$ ,  $R_g = 10\Omega$ )

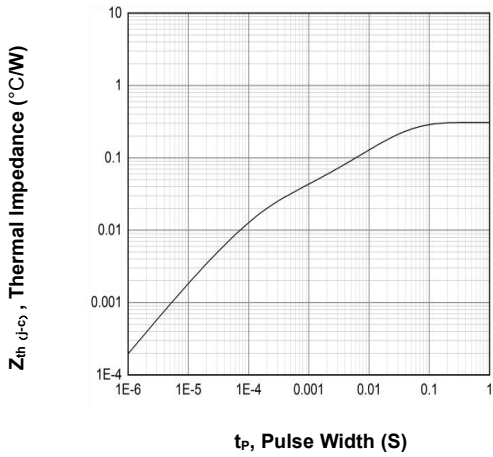

**Figure 15. Transient thermal impedance of IGBT**  
( $D = 0$ )

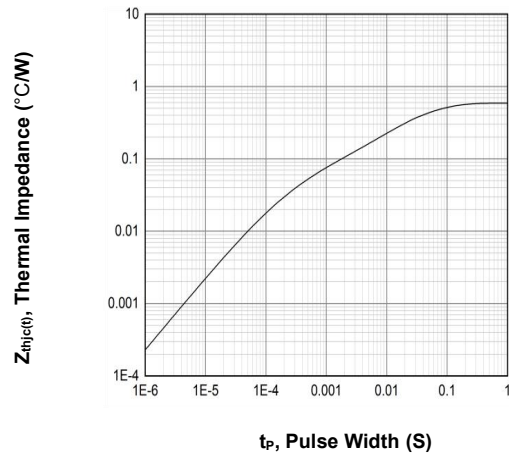


**Figure 16. Transient thermal impedance of diode**  
( $D = 0$ )

### TO264-3L Package Outline

#### TO-264-3L MECHANICAL DATA

UNIT: mm

SYMBOL	MIN	NOM	MAX	SYMBOL	MIN	NOM	MAX
A	4.80	5.00	5.20	E	19.80	20.00	20.20
A1	2.60	2.80	3.00	E1	17.80		18.20
B	2.95	3.15	3.35	e		5.45	
B1	2.50	2.65	2.80	L	19.80	20.10	20.40
b	0.90	1.00	1.10	L1	2.95		3.55
c	0.50	0.60	0.70	ΦP	3.05	3.20	3.35
D	25.80	26.00	26.20	S	5.80		6.20
D1	20.50		21.10				

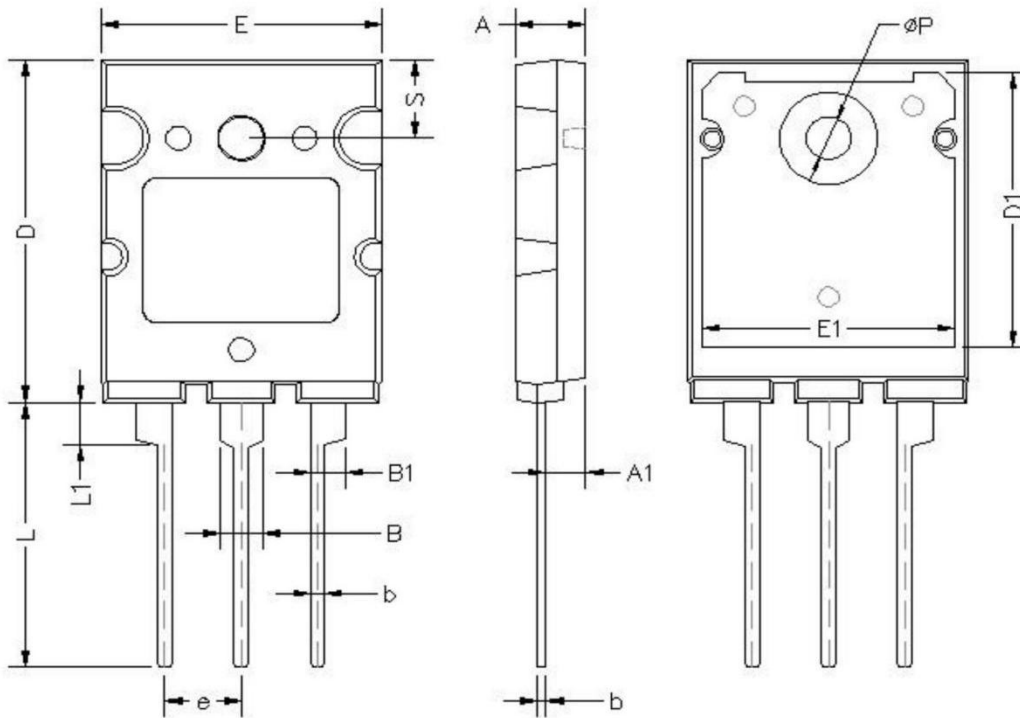

### Revision History

Revision	Date	Subjects (major changes since last revision)
0.1	2023-9-18	Target version
1.0	2024-3-25	Preliminary version

The information given herein shall be not regarded as a guarantee of conditions or characteristics .For any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Drvtek hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given herein is subject to customer's compliance with its obligations stated herein and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Drvtek in customer's applications.

The data contained herein is exclusively intended for technically trained staff. It is the responsibility of customer to evaluate the suitability of the product for the intended application and the completeness of the product information given herein for such application.

For further information on the product, technology, delivery, conditions and prices please contact Drvtek ([www.Drvtek.com](http://www.Drvtek.com)).

#### Warnings

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact Drvtek.

Except as otherwise approved by Drvtek in a written document, Drvtek products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.